

Wheel Locking Nut Removal Kit

An 11-piece tapered 1/2"D socket set for removing wheel locking nuts where the original key is missing and/or the wheel nut is damaged. Suitable for tyre fitting bays and garages.




Additional Information

- 8 x conical dismantling sockets; length 60mm.
- Inner diameters: 18.5 - 15.6mm, 19.5 - 17.6mm, 20.4 - 18.5mm, 21.6 - 19.7mm, 22.5 - 20.6mm, 23.6 - 21.7mm, 24.5 - 22.6mm and 25.5 - 23.6mm.
- Air hammer adaptor allows use of the Laser air hammer (Part No. 6031) if required. Driven using a power bar such as Laser Part No. 1343.
- Manual fitting tool and removal punch manufactured from chrome molybdenum.
- Spare conical dismantling sockets available, please see Laser Part Nos. 60515 (18.5 - 15.6mm), 60516 (19.5 - 17.6mm), 60517 (20.4 - 18.5mm), 60518 (21.6 - 19.7mm), 60519 (22.5 - 20.6mm), 60520 (23.6 - 21.7mm), 60521 (24.5 - 22.6mm) & 60522 (25.5 - 23.6mm).


<http://lasertools.co.uk/product/6972>

Video available: https://youtu.be/qPeaR9NG_a4


METHOD 1

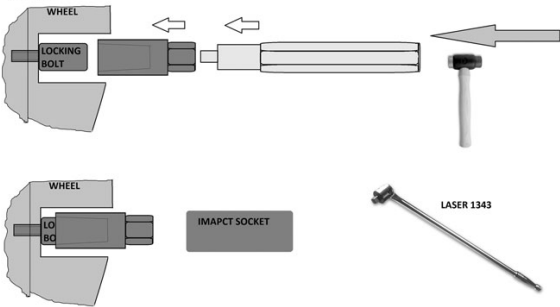

METHOD 2

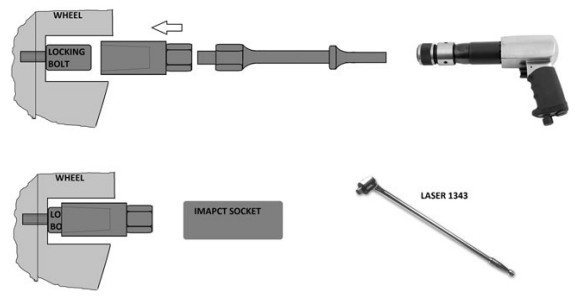

METHOD 1

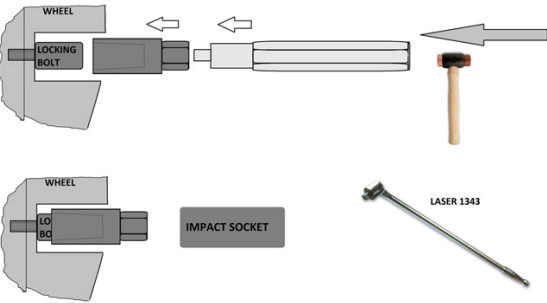

METHOD 2

