


Installation Instructions

Riveter with 30 Rivets - **Part No. 0217**

Spare Jaws - **Part No. 2804**


1.

Turn the slot on the jaw case pin 90°, then push the jaw case pin out of its slot.

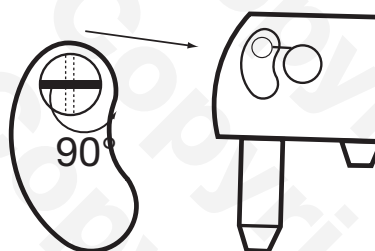

2.

Take the jaw case out of the body and replace with new jaws.

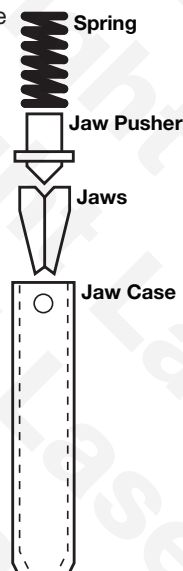


3.

Replace the parts as they were before when new jaws are fitted.



4.

As illustrated use the jaw case to compress the spring, then use a blind rivet into the temporary pin hole on the side of the jaw case.

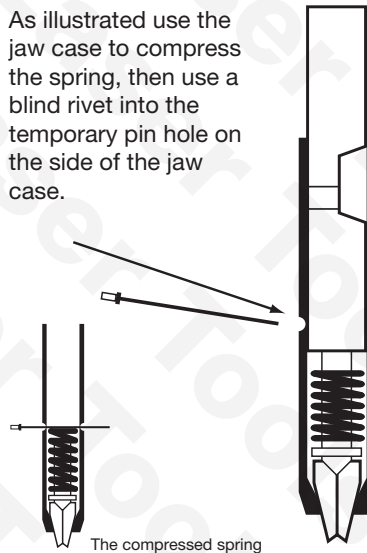

5.

Set the temporary pinned jaw case into the body, make sure the pin stays in place. Then return jaw case to its slot, turning it 90° to secure back in place. It is then safe to remove the rivet so the spring makes contact with the jaw case pin.

