

Our products are designed to be used correctly and with care for the purpose for which they are intended. No liability is accepted by the Tool Connection for incorrect use of any of our products, and the Tool Connection cannot be held responsible for any damage to personnel, property or equipment when using the tools. Incorrect use will also invalidate the warranty.

If applicable, the applications database and any instructional information provided has been designed to offer general guidance for a particular tool's use and while all attention is given to the accuracy of the data no project should be attempted without referring first to the manufacturer's technical documentation (workshop or instruction manual) or the use of a recognised authority such as Autodata.

It is our policy to continually improve our products and thus we reserve the right to alter specifications and components without prior notice. It is the responsibility of the user to ensure the suitability of the tools and information prior to their use.



Safety First. Be Protected.



www.lasertools.co.uk



Distributed by The Tool Connection Ltd
Kington Road, Southam, Warwickshire CV47 0DR
T +44 (0) 1926 815000 F +44 (0) 1926 815888
info@toolconnection.co.uk www.toolconnection.co.uk

Guarantee

If this product fails through faulty materials or workmanship, contact our service department direct on: +44 (0) 1926 818186. Normal wear and tear are excluded as are consumable items and abuse.

www.lasertools.co.uk

Part No. 6424

LASER[®]

Thin-walled Glow Plug Socket Set Specialist | 18pc

Instructions



www.lasertools.co.uk

Introduction

An 18 piece socket set specially designed for the removal of modern glow plugs. The 6424 set includes the very latest special socket and protective sleeves for PSG plugs (Pressure Sensor Glow-plug).

PSG type glow plugs are very delicate and require a special protective sleeve to be fitted before removal to protect against static charge and physical damage. The size of the PSG type glow plug also requires a special sized socket equipped with a snap ring to ensure the plug does not accidentally fall out of the socket.

Applications include: Audi, Seat, Skoda, Volkswagen, Mercedes-Benz, Smart, VAG, Fiat, and Vauxhall/Opel.

Components

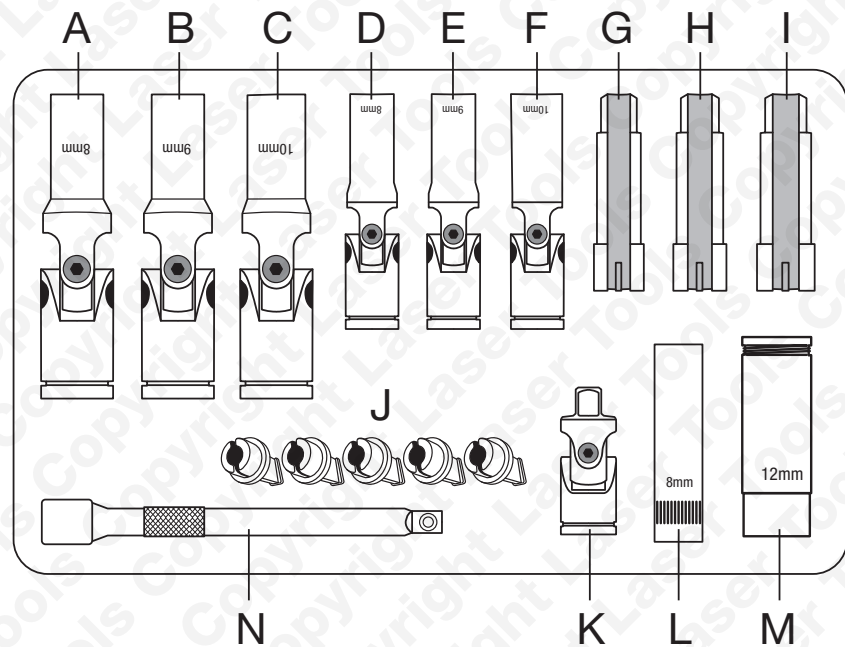


Figure 1

Ref.	Quantity	Description
A	1	8mm 72mm deep 3/8" drive socket with U/J
B	1	9mm 72 mm deep 3/8" drive socket with U/J
C	1	10mm 72mm deep 3/8" drive socket with U/J
D	1	8mm 60mm deep 1/4" drive socket with U/J
E	1	9mm 60mm deep 1/4" drive socket with U/J
F	1	10mm 60mm deep 1/4" drive socket with U/J & snap ring
G	1	8mm split socket
H	1	9mm split socket
I	1	10mm split socket
J	5	PSG anti-static protection caps
K	1	1/4" drive U/J
L	1	8mm 50mm deep 1/4" drive deep socket
M	1	12mm single hex 50mm deep socket with snap ring
N	1	1/4" drive extension

Instructions

Special Note for PSG glow plugs:

Fit the PSG anti-static protector cap before removing glow plug (refer to **Figure 2**).

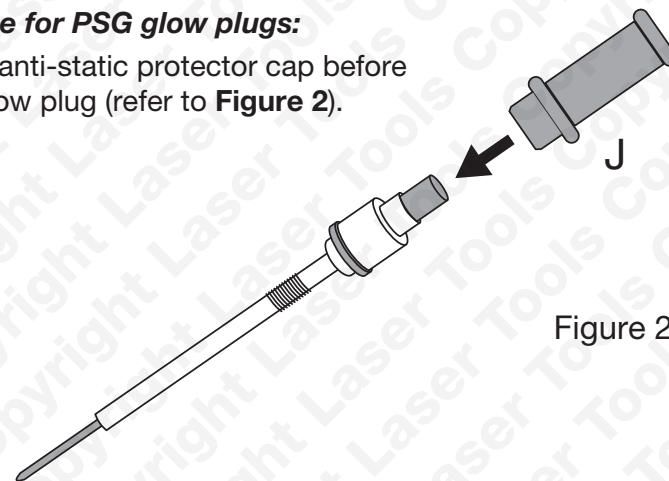


Figure 2

The 12mm PSG socket (**M**) is equipped with a spring loaded ball gripping device to hold the glow plug securely while fitting and removing.