

Valve Shim Tool



Kawasaki

- Compresses valve shim bucket when removing valve adjustment shim
- Application: KZ750 to 1300 4 and 6 cylinder twin cam engines from 1976-2005, Z1 900, A900, B900, KZ900, KZ1000, KZ1100, KZ1300, ZN1300.
- Ideal tool when setting valves with shim type adjustment.
- Use with Laser 6489 Tappet Shim Pliers.
- Use according to Vehicle manufactures instructions.

Instructions

- Set the cam lobe as shown in Figure 1.
- Push the lever tool in between the cam lobe and the tapet. Lever the tapet down and insert the appropriate side of the holding tool as shown in Figure 2 between the shim bucket and camshaft.
- Remove the lever tool and remove the tappet shim.
- Fit new shim and use the lever to release the holding tool in a controlled manner.

NOTE: The holding tool is double ended, the 7.0mm end is used on KZ750 models only.

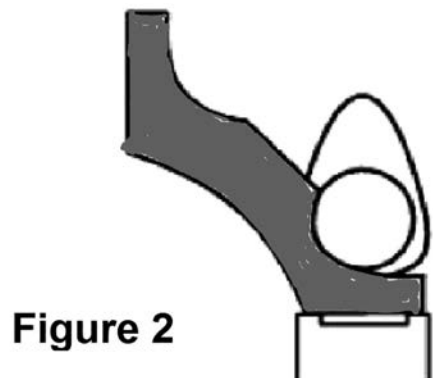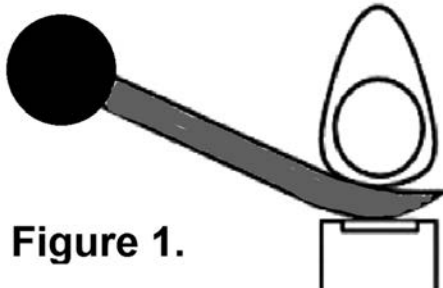

Guarantee

If this product fails through faulty materials or workmanship, contact our service department direct on: +44 (0) 1926 818186. Normal wear and tear are excluded as are consumable items and abuse.



Distributed by The Tool Connection Ltd

Kineton Road, Southern, Warwickshire CV47 0DR
T +44 (0) 1926 815000 F +44 (0) 1926 815888
info@toolconnection.co.uk www.toolconnection.co.uk



24 March 2017 11:59 AM

5 018341 065171 >