

Precautions

- Tighten in a steady and controlled manner and stop applying pressure immediately the required setting has been reached. Tightening too quickly or in a jerky manner will result in an inaccurate final torque figure.
- Take care to stop applying further torque once the desired setting has been reached. Over-torquing can damage the wrench.
- Do not adjust **down** to another torque setting; adjust down to zero then back **up** to the desired torque setting.
- After using the wrench, unlock and turn the adjusting lever to the lowest setting for storage. The lever will stop when the lowest setting has been reached.
- Keep the breaker mechanism lubricated with HP grease.
- Never use the torque wrench to tighten a fastener to a higher torque than the maximum torque setting.
- Do not use the torque wrench as a breaker bar.
- Take care of the torque wrench and keep it clean; do not store in areas of high temperature or humidity.
- Do not use any cleaning material or solvent that may affect the grease in the breaker mechanism.

Warranty

Our warranty policy is one year from date of purchase. Please register your date of purchase by going to: www.lasertools.co.uk/product-registration

To register you will be asked for the following information:

Name and Address

Retailers Name and Town

Date of purchase (always keep receipt)

Part Number and Serial Number

The Serial Number can be found on your Certificate of Conformance in accordance with ISO 6789-1.



Safety First. Be Protected.

7204-9_Instructions_V4

Guarantee

If this product fails through faulty materials or workmanship, contact our service department direct on: **+44 (0) 1926 818186**. Normal wear and tear are excluded as are consumable items and abuse.

Distributed by The Tool Connection Ltd

Kineton Road, Southam, Warwickshire CV47 0DR
T +44 (0) 1926 815000 F +44 (0) 1926 815888
info@toolconnection.co.uk www.toolconnection.co.uk



7204 | 7205 | 7206 | 7207 | 7208 | 7209

LASER[®]

Classic Torque Wrench

Push Thru' Reversible Drive

Instructions



Please visit:

www.lasertools.co.uk/registration
for your online Guarantee Registration

www.lasertools.co.uk

Introduction

This professional quality torque wrench comes with its own certificate of test and calibration. The shaft of the wrench is marked up in Newton metres (Nm), pound-foot (lb.ft), kilogram metre (kg.m) and pound/inch (lb.in).

When selecting a torque wrench, determine what the average or most common torque setting will be when you use it. Then choose a torque wrench that will adequately cover your anticipated torque specifications by selecting one with an appropriate scale for your requirements.

Part Number	Drive	Range
7204	1/4"D	2.5 - 11Nm
7205	3/8"D	5 - 33Nm
7206	3/8"D	12 - 68Nm
7207	3/4"D	140 - 560Nm
7208	3/4"D	200 - 800Nm
7209	1"D	200 - 1000Nm

This torque wrench is ideal for use in noisy environments as the progressive torque build-up to the selected setting is easily detected by three clear signals:

- Sight: the mechanism can be seen moving towards the break point as the load is applied.
- Touch: the operator can feel the torque build-up and then the very positive click at the break point.
- Sound: audible click at break point.


The handle is free to rotate on the wrench's shaft so any twisting of the handle when torquing up a nut will not affect the accuracy of the device. Changes to the torque setting are carried out by pulling a lever-bar from the end of the handle which is then rotated to obtain the correct torque setting.

Unlike many other designs of torque wrench, the mechanism pivots around the square drive and thus the wrench is not length-dependant; there is no error or variation to the application of the preset torque value, no matter where the handle is held.

The drive shank can be pushed through the body of the wrench which enables the wrench to torque up right-hand or left-hand threads equally easily.

Instructions

1. Refer to diagram. To adjust torque, first pull the end cap **(A)** back to release the adjusting lever **(B)**.
2. Rotate the adjusting lever clockwise to raise the desired torque figure and anticlockwise to lower. Refer to the dual scale **(C)** and adjust to the desired torque.
3. Lock this figure by pushing the adjusting lever **(B)** back into the body of the wrench and close the end cap **(A)**.
4. Commence tightening the fixing. You will feel and hear the wrench mechanism give (or click) when the set torque is reached. Immediately stop applying tension to avoid over- tightening.

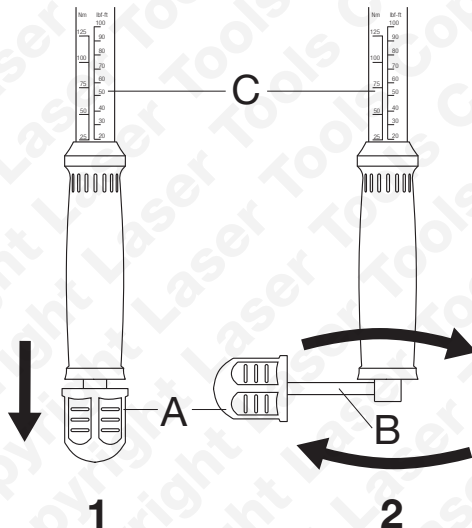

Our products are designed to be used correctly and with care for the purpose for which they are intended. No liability is accepted by the Tool Connection for incorrect use of any of our products, and the Tool Connection cannot be held responsible for any damage to personnel, property or equipment when using the tools. Incorrect use will also invalidate the warranty. It is our policy to continually improve our products and thus we reserve the right to alter specifications and components without prior notice. It is the responsibility of the user to ensure the suitability of the tools and information prior to their use.